HITCH

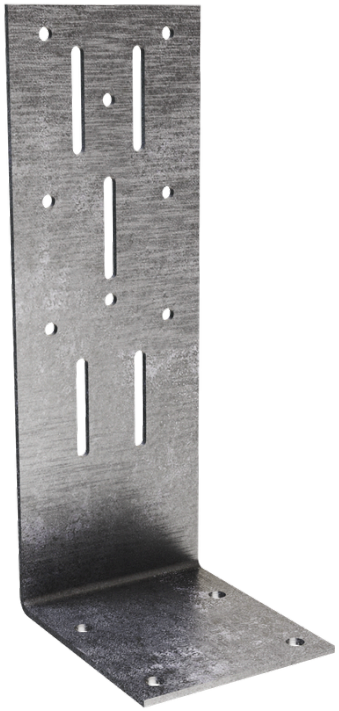

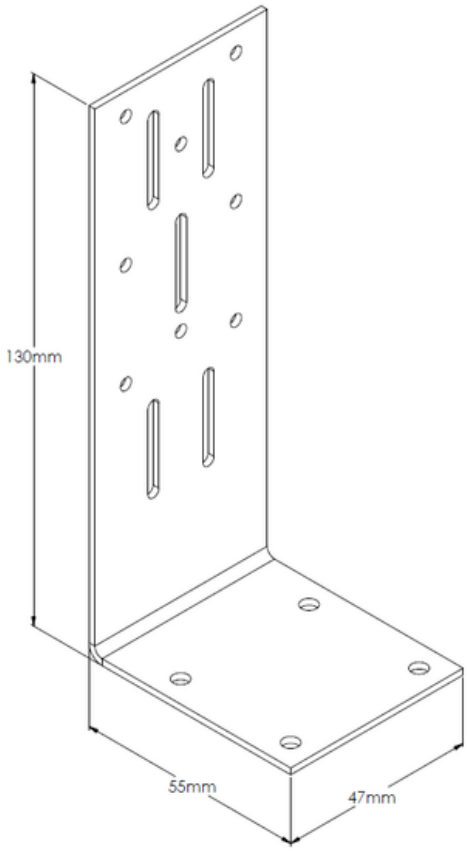

PRODUCT DESCRIPTION

WILMAPLEX Hitch provides lateral restraint to non-loadbearing internal walls whilst allowing vertical movement between the wall and the trussed roof or ceiling battens, preventing unintended load transfer and reducing the risk of structural or plasterboard damage.

MATERIAL

WILMAPLEX Hitch are manufactured using G300 Z275 galvanised steel.

COMPLIANCE

- Non-loadbearing internal walls must have 10mm gap from truss/batten to wall top plate.
- Use max 1800mm spacing along wall length.

PRODUCT RANGE

PRODUCT CODE	DESCRIPTION	CARTON QTY
1.6MM THICKNESS		
PA47	130mm x 55mm 47mm	50