PRODUCT DATA SHEET

WILMAPLEX

RIGHT-ANGLE STUD TIE

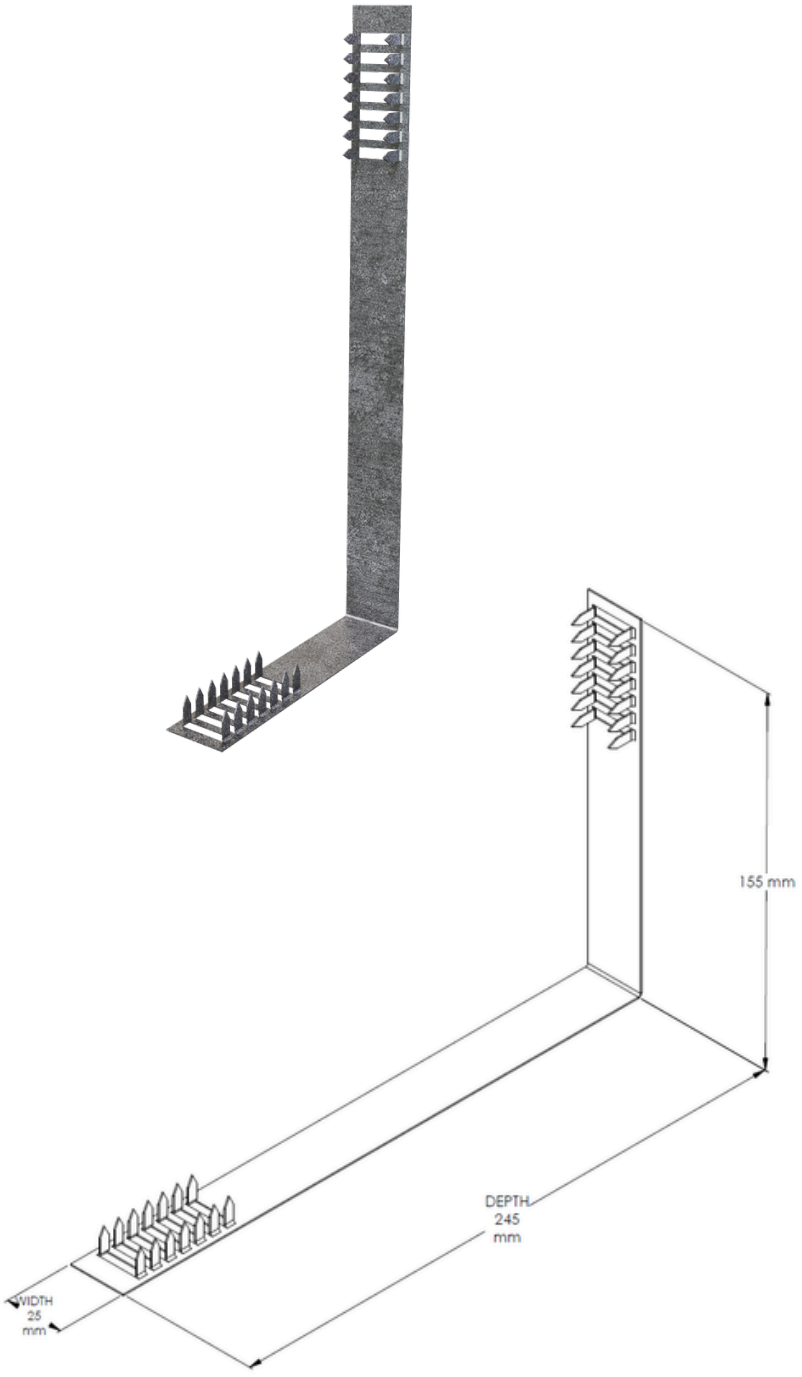

Complies with AS1684

PRODUCT DESCRIPTION

WILMAPLEX Right-Angle Stud Ties are quick and effective connectors designed to provide a strong, reliable connection between studs and wall plates. Their right-angle design allows for easy installation and secure fastening in timber framing applications, making them suitable for tying top and bottom wall plates to studs in high wind areas and other general structural timber framing applications.

MATERIAL

WILMAPLEX Stud Ties are manufactured from G300 Z275 galvanised steel with 1mm thickness.

PRODUCT RANGE

PRODUCT CODE	DESCRIPTION	CARTON QTY
ST R/A 400x25	Stud Tie 155 x 245 x 25	40

DESIGN CAPACITY

PRODUCT CODE	Design capacity, φNj (kN) per stud tie
JD4	6.3

sales@wilmaplex.com.au
(03) 9775 0855

BUILDING AUSTRALIA SINCE 1987

INSTALLATION GUIDE

STEP 1

Position the shorter leg of the Stud Tie against the outside face of the wall plate and hold it securely in place.

STEP 2

Hammer the preformed teeth on the shorter leg into the stud. Then bend the longer leg tightly around the wall plate and hammer its remaining preformed teeth into the opposite side of the stud to complete the installation.